

Note : The pictures in the Product Specification are for reference only, please refer to the actual product.

PRODUCT SPECIFICATION

VIVA SILICONE NEON

VIVA Silicone HEX

Top White 1617





TITAN AURORA



- UGR<22, high brightness with soft and uniform illumination without hotspots, suitable for various lighting environments;
- Unique white exterior design, simple yet sophisticated, perfectly showcasing the product's seamless integration into space;
- Combines a unique structure, anti-glare design, and a seamless bottom with frosted and high-gloss matte finishes;
-
- Made of eco-friendly silicone material with co-extrusion production, IP67 rating, resistant to salt solutions, acids, alkalis, and UV;

Dimension structure (Unit: mm)

Low-voltage power supply, suitable for both household and public spaces, ensuring high safety.

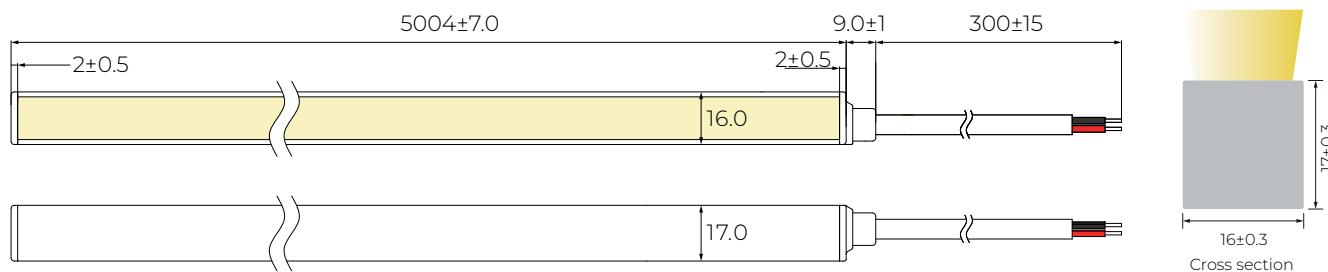


Min Bending diameter

Electrical Parameter

Voltage	LED PIN Temperature	Storage Temperature	Ambient Temperature
DC24V	Max. 65 C	-25 C ~ 60 C	Min.-25°C Max(Table below)

Specification

Due to the tolerance of the production and electrical components, output value and electrical power can vary up to 10%




Bend vertical only

Power (w/m)	Efficacy (lm/w) @4000K	Max Ambient Temperature
10	CV : 52.4 CC : 52.4	45 C


Length Standard

Length Range (M)	Final Length (mm)		Tolerance (mm)
	Integral end cap	Silicone end cap	
0<Neon Strip(L)≤5	L+4	L+5.5	±7
5<Neon Strip(L)≤10	L+4	L+5.5	±10

Light Distribution Curve

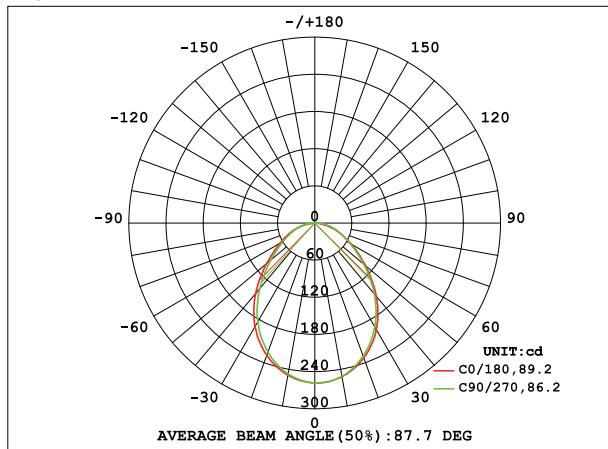


Illuminance curve

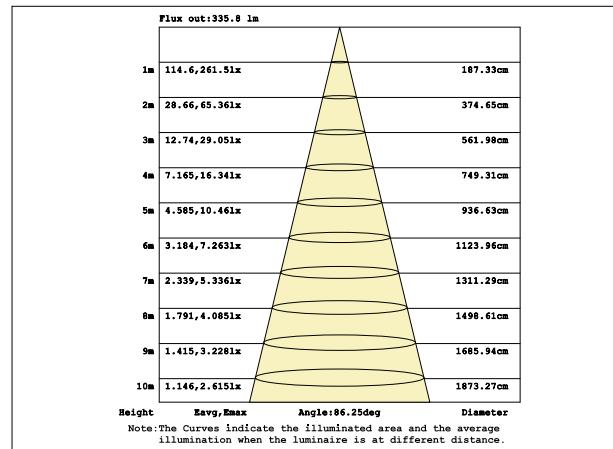


Note: The above date is based on 24V, 10W/M, single colour with 4000k colour temperature. If you need IES files for other types. Please contact our sales department.

Parameter Table

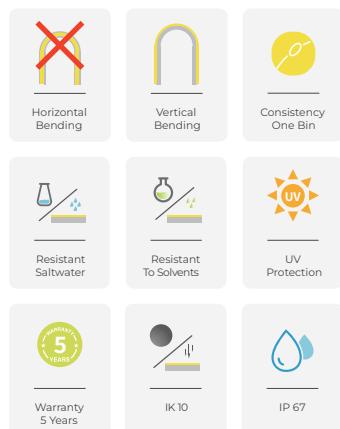

	Ra	SDCM	Volt-age	Pow-er(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max Run Length (M)	CC/CV
1800±100	≥90	--	DC24V	10	425	42.5	50	5	CV
2100±150	≥90	--	DC24V	10	454	45.4	50	5	CV
2400±150	≥90	--	DC24V	10	509	50.9	50	5	CV
2700	≥90	≤5	DC24V	10	562	56.2	50	5	CV
3000	≥90	≤5	DC24V	10	541	54.1	50	5	CV
3500	≥90	≤5	DC24V	10	612	61.2	50	5	CV
4000	≥90	≤5	DC24V	10	623	62.3	50	5	CV
5000	≥90	≤5	DC24V	10	535	53.5	50	5	CV
6500	≥90	≤5	DC24V	10	559	55.9	50	5	CV

- The maximum series length refers to the maximum length of the light strip with single-end power supply in series under the standard 30CM cable.
- For the load capacity of the solder free end cap, please refer to <The Maximum Load Capacity of Power Cables>
- The given color temperature is the temperature of finished product.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- All products can be dimmed; the dimmer's voltage should conform to the rated voltage of the led light.
- The output frequency of the dimmer of the constant-current led light should be less than 2K Hz, and the output PWM can control the led light. Single color (CV)CCT(K)

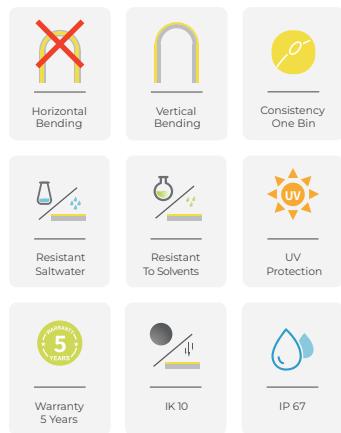


Single color (CC)

CCT(K)	Ra	SDCM	Volt-age	Power(W)	Lumen (LM/M)	Efficiency (LM/W)	Unit Length (mm)	Max. Run Length (M)	CC/CV
1800±100	≥90	--	DC24V	10	425	42.5	50	10	CC
2100±150	≥90	--	DC24V	10	454	45.4	50	10	CC
2400±150	≥90	--	DC24V	10	509	50.9	50	10	CC
2700	≥90	≤5	DC24V	10	562	56.2	50	10	CC
3000	≥90	≤5	DC24V	10	541	54.1	50	10	CC
3500	≥90	≤5	DC24V	10	612	61.2	50	10	CC
4000	≥90	≤5	DC24V	10	623	62.3	50	10	CC
5000	≥90	≤5	DC24V	10	535	53.5	50	10	CC
6500	≥90	≤5	DC24V	10	559	55.9	50	10	CC

- The maximum series length refers to the maximum length of the light strip with single-end power supply in series under the standard 30CM cable.
- For the load capacity of the solder free end cap, please refer to <The Maximum Load Capacity of Power Cables>
- The given color temperature is the temperature of finished product.
- The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.
- All products can be dimmed; the dimmer's voltage should conform to the rated voltage of the led light.
- The output frequency of the dimmer of the constant-current led light should be less than 2K Hz, and the output PWM can control the led light.

Cable Entry (Unit: mm)

Integral End Cap (IP67)

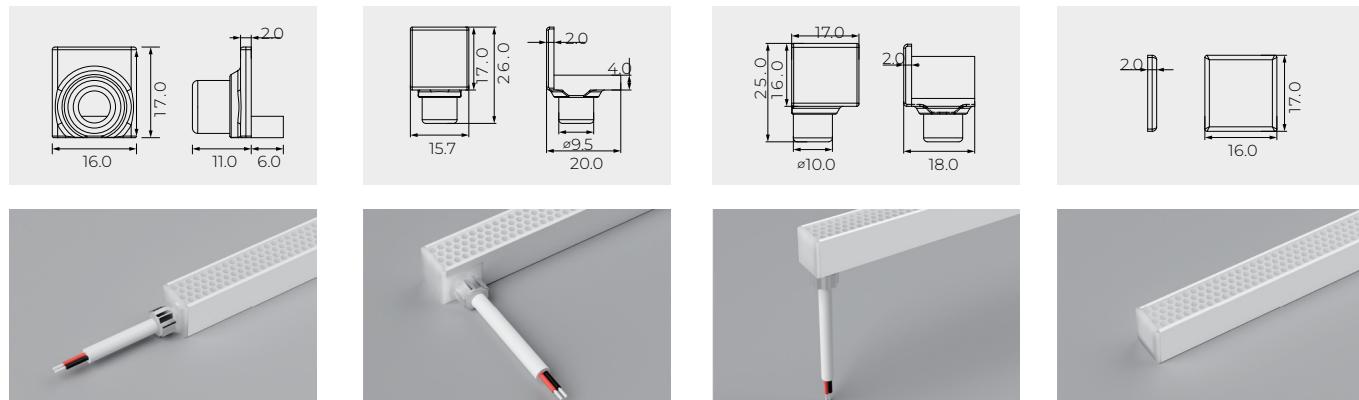





Front Cable Entry

Side Cable Entry

Bottom Cable Entry

Closed End cap

Silicone end cap (IP67)



Front Cable Entry



Side Cable Entry



Bottom Cable Entry




Closed End cap

Cable

Cable Type	Schematic Diagram	Specification	Core	Electrical Properties
Silicone Cable		OD: 6.0mm / Inner core: 20AWG	● ●	Red V+、Black V-
Waterproof Connector with Silicone Cable		OD: 6.0mm / Inner core: 20AWG M12Male / Female connector	● ●	Red V+、Black V-


Cutting Mark

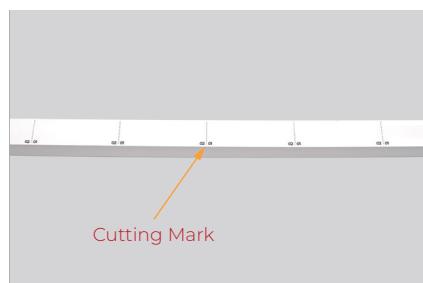

Remark:
the black marker is the cutting position





Use professional scissors to cut vertically at the cutting mark



Please don't be feel free to cut and cut into an oblique angle or cambered section.

Accessories (Unit: mm)

Aluminium Profile

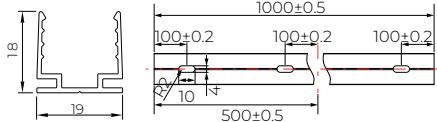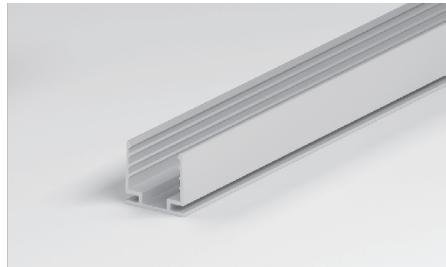


Length: 1000X19X18

Accessories:

Screw M3X16 (SUS304)

Aluminium Mounting clips




Length: 35X19X18

Accessories:

Screw M3X16 (SUS304)

Black Profile


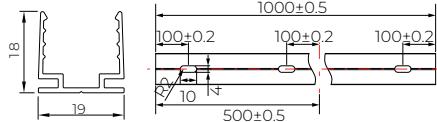


Length: 1000X19X18

Accessories:

Screw M3X16 (SUS304)

Internal Gear Profile

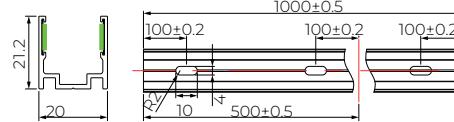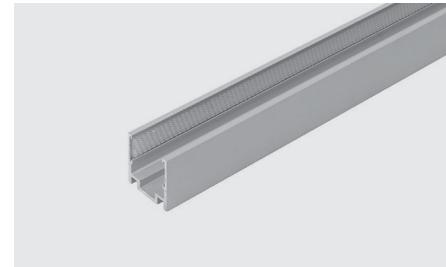


Length: 1000X20X21.2

Accessories:

Screw M3X16 (SUS304)

PC Profile

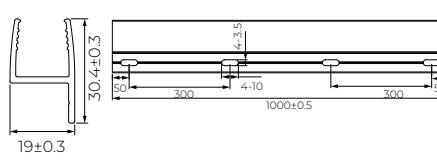


Length: 1000X19X30.4

Accessories:

Screw M3X16 (SUS304)

PC Profile


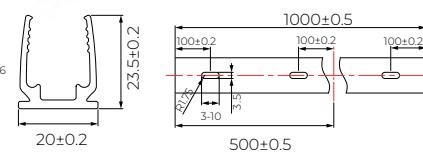


Length: 1000X20X23.5

Accessories:


Screw M3X16 (SUS304)

Curved profile

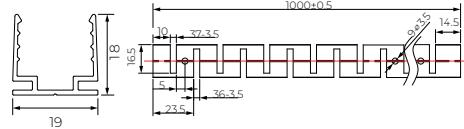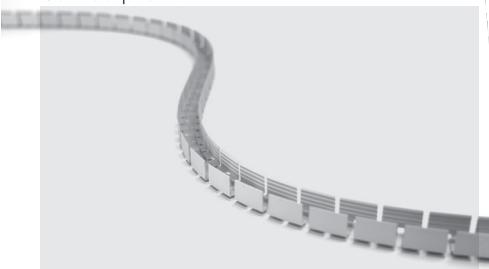



Length: 1000X19X18
Accessories: Screw M3X16 (SUS304)

PC Clip






Length: 35X20X23.5
Accessories: Screw M3X16 (SUS304)

Flexible Recessed Single-Sided Aluminum Profile


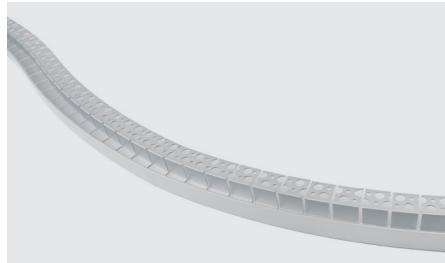


Length:
1000x39.1x19.9
Accessories:
Screw M3X16 (SUS304)

Installation method of flexible recessed single-sided aluminum profile

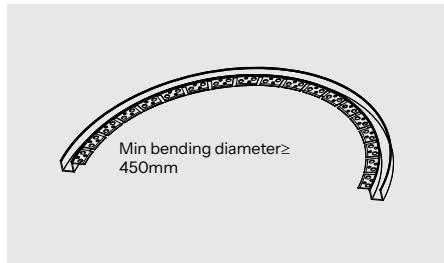
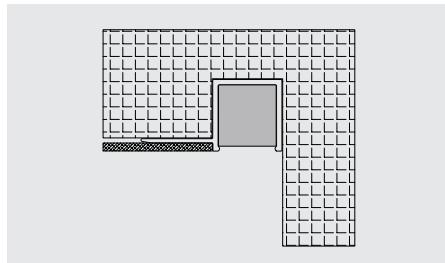
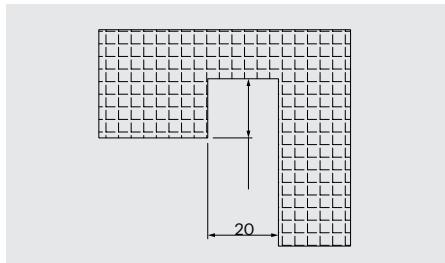


Flexible Recessed Double-Sided Aluminum Profile

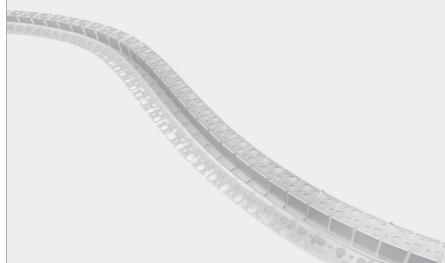


Length:
1000x58.9x19.9
Accessories:
Screw M3X16 (SUS304)



Installation method of flexible recessed double-sided aluminum profile

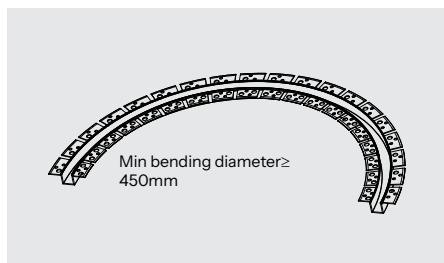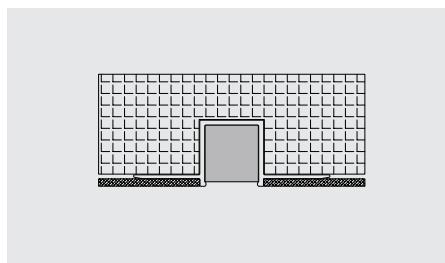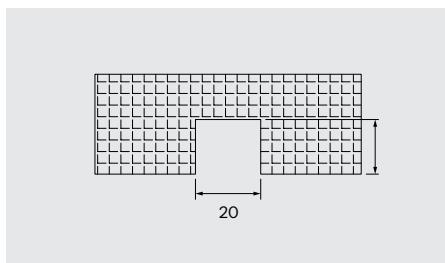


Single Color Connection Diagram

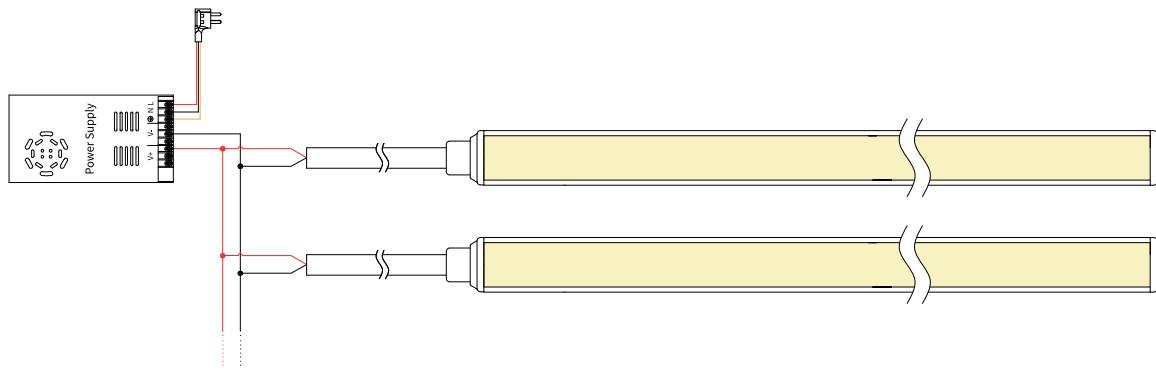

Installation Precautions

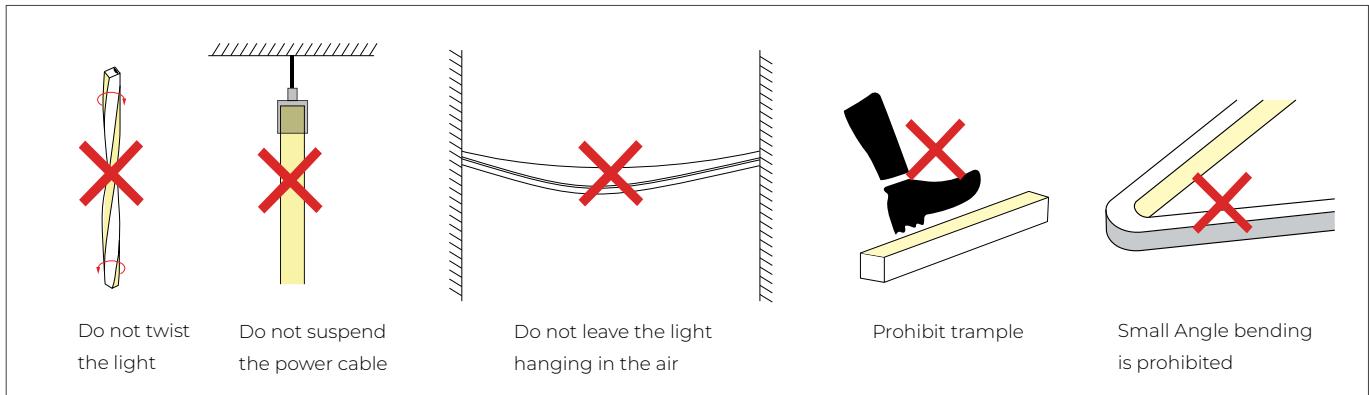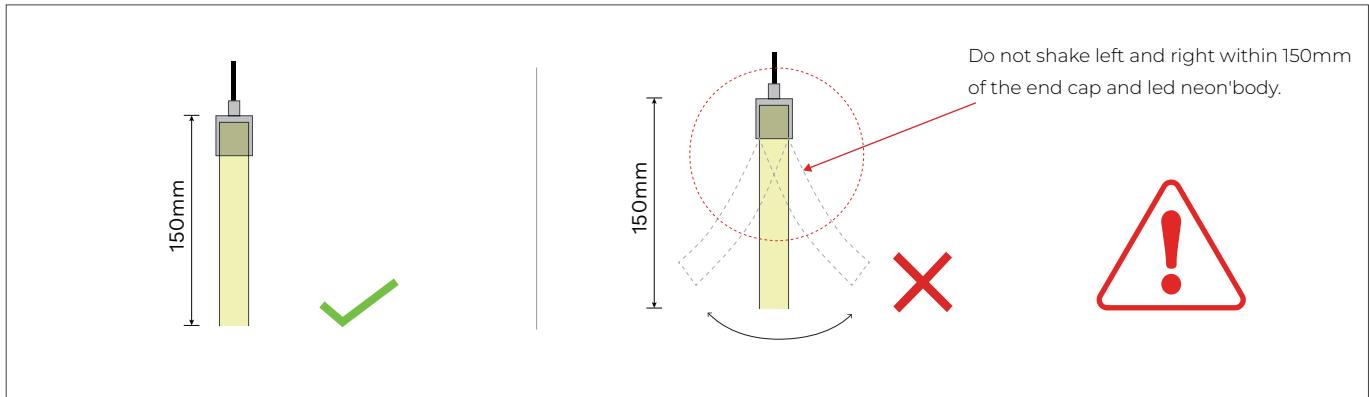


Put it in the profile

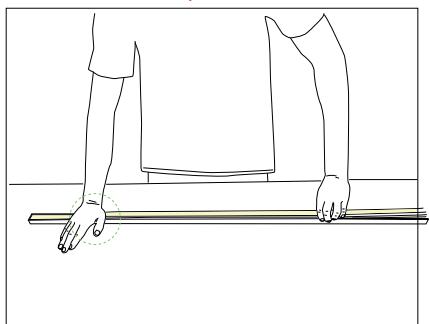

Please press the led strip with your palm to slowly insert the led strip into the groove, and gently straighten the led strip above the groove with your right hand.

Try to keep the led strip in a flat state during the installation process.

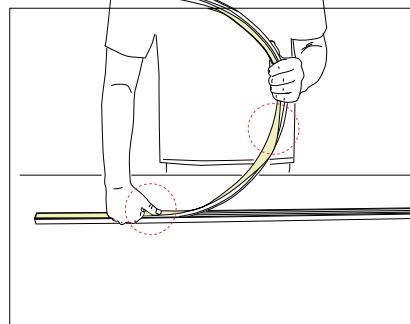

- Do not press the led strip with a single finger, it is easy to damage the internal parts of the led strip. The bent arc of the led strip should not be too large during installation.



Installation Precautions -- Side Mounted

(If the length of the light is more than 2 meters, two persons must work together to install it.)

Figure 1

Hold the light and rotate it 90°, make ensure the light is bent in the correct direction.

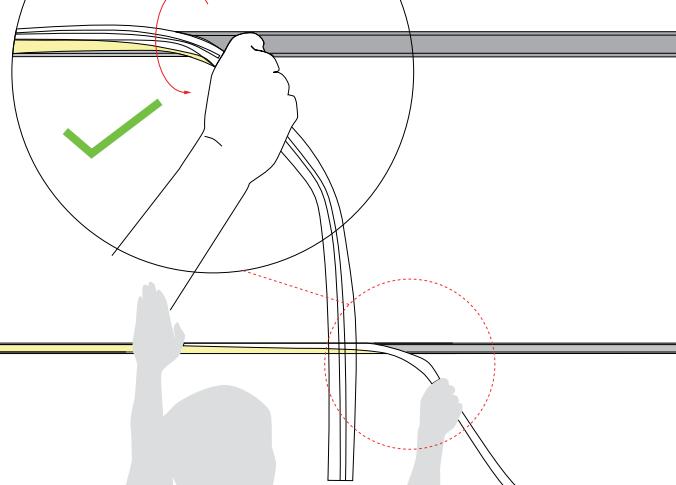
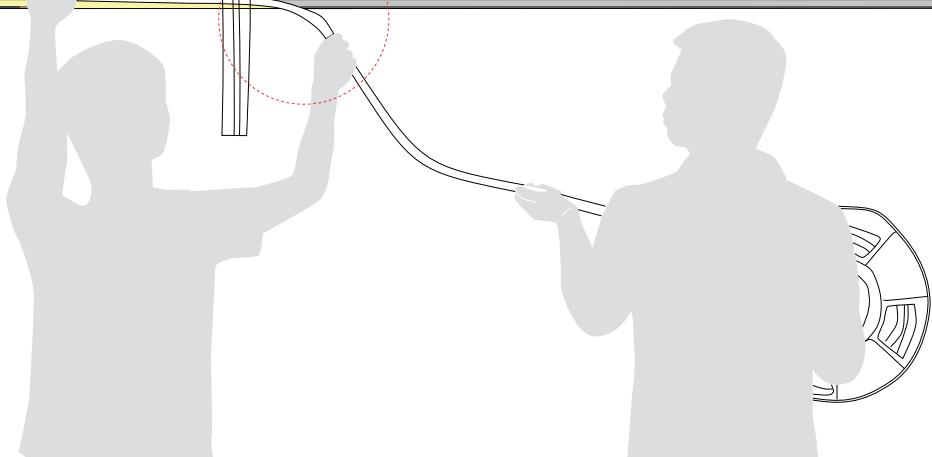


Figure 2

Luminous Surface


1. Installer:

-Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand, hold it and rotate it 90 ° to droop it in the direction of your hand. See Figure 1.


-Do not bend the luminous surface to the side. See Figure 2.

2. Assistant:

-Cooperate with the installer to lift the reel of the light, and then slowly deliver the light to installer. Do not pull or twist the light during the installation.

Installation Precautions -- Side Mounted

(If the length of the light is more than 5 meters, two persons must work together to install it.)

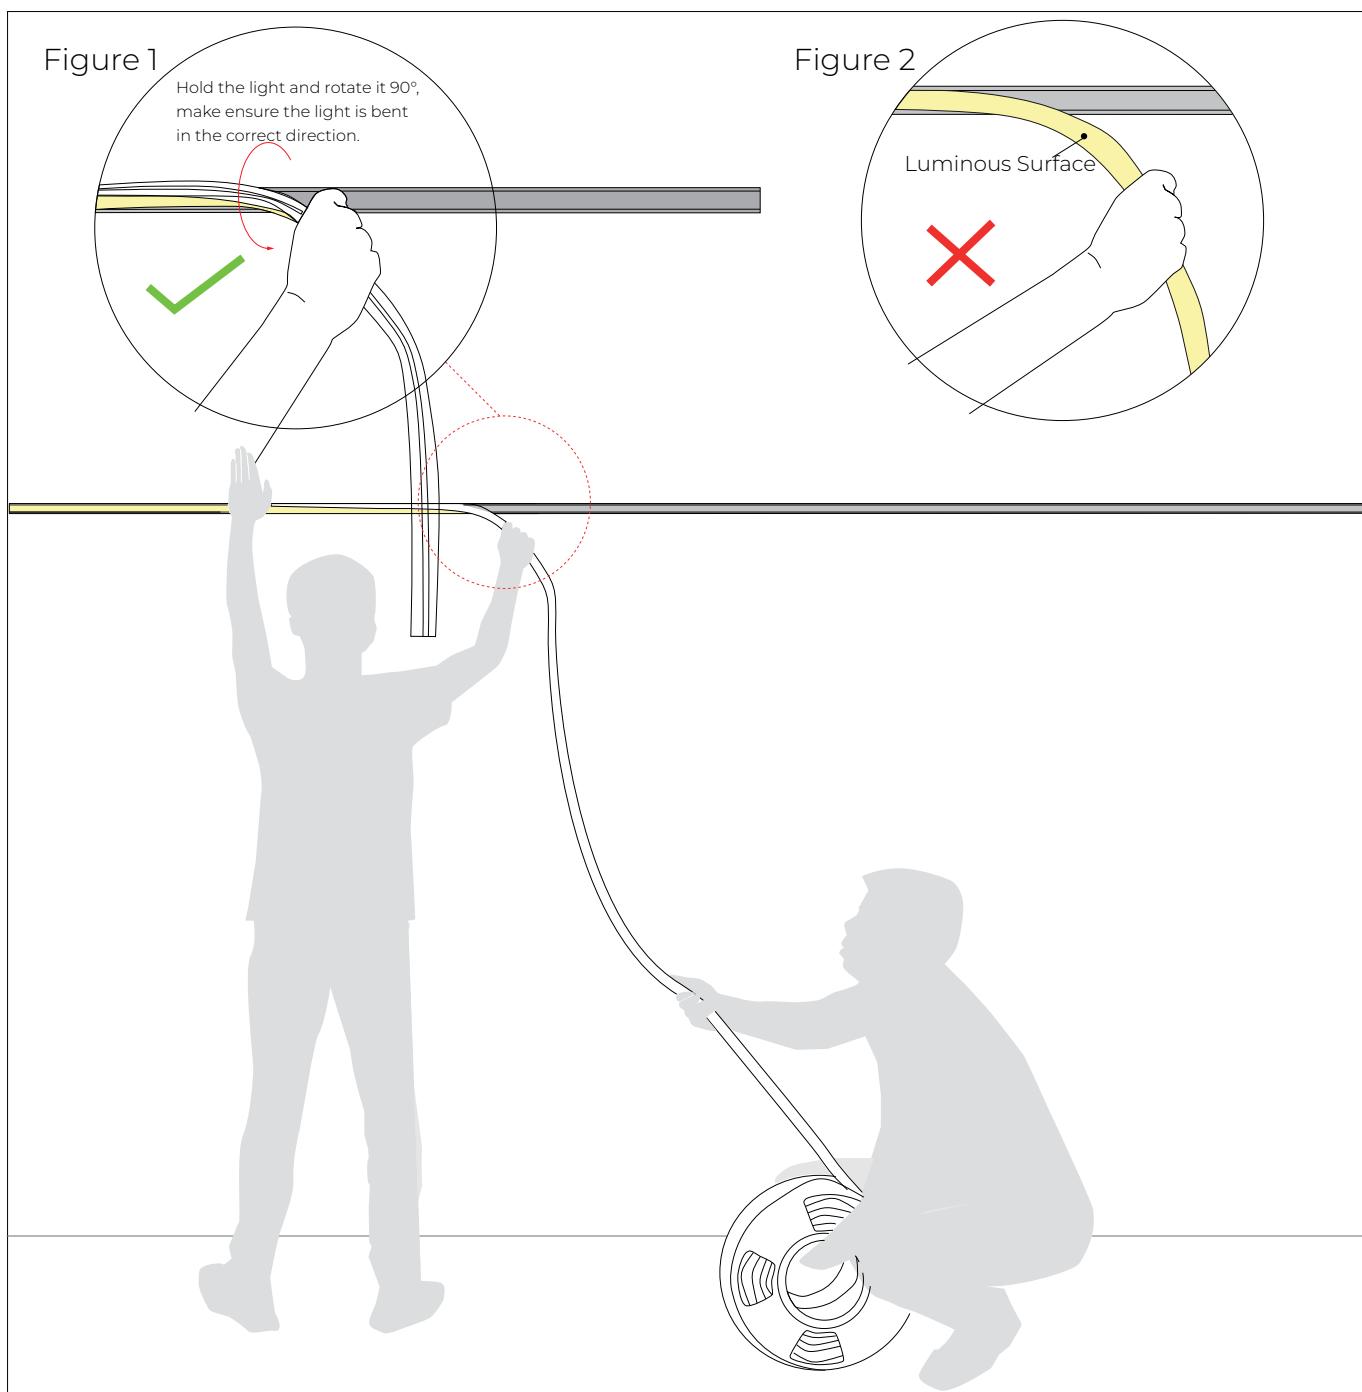
1. Installer:

-Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with right hand, hold it and rotate it 90 ° to droop it in the direction of your hand. See Figure 1.


-Do not bend the luminous surface to the side. See Figure 2.

2. Assistant:

-Cooperate with the installer to slowly deliver the light to installer. Do not pull or twist the light during the installation.

Installation Precautions -- Top Mounted

(If the length of the light is more than 2 meters, two persons must work together to install it.)

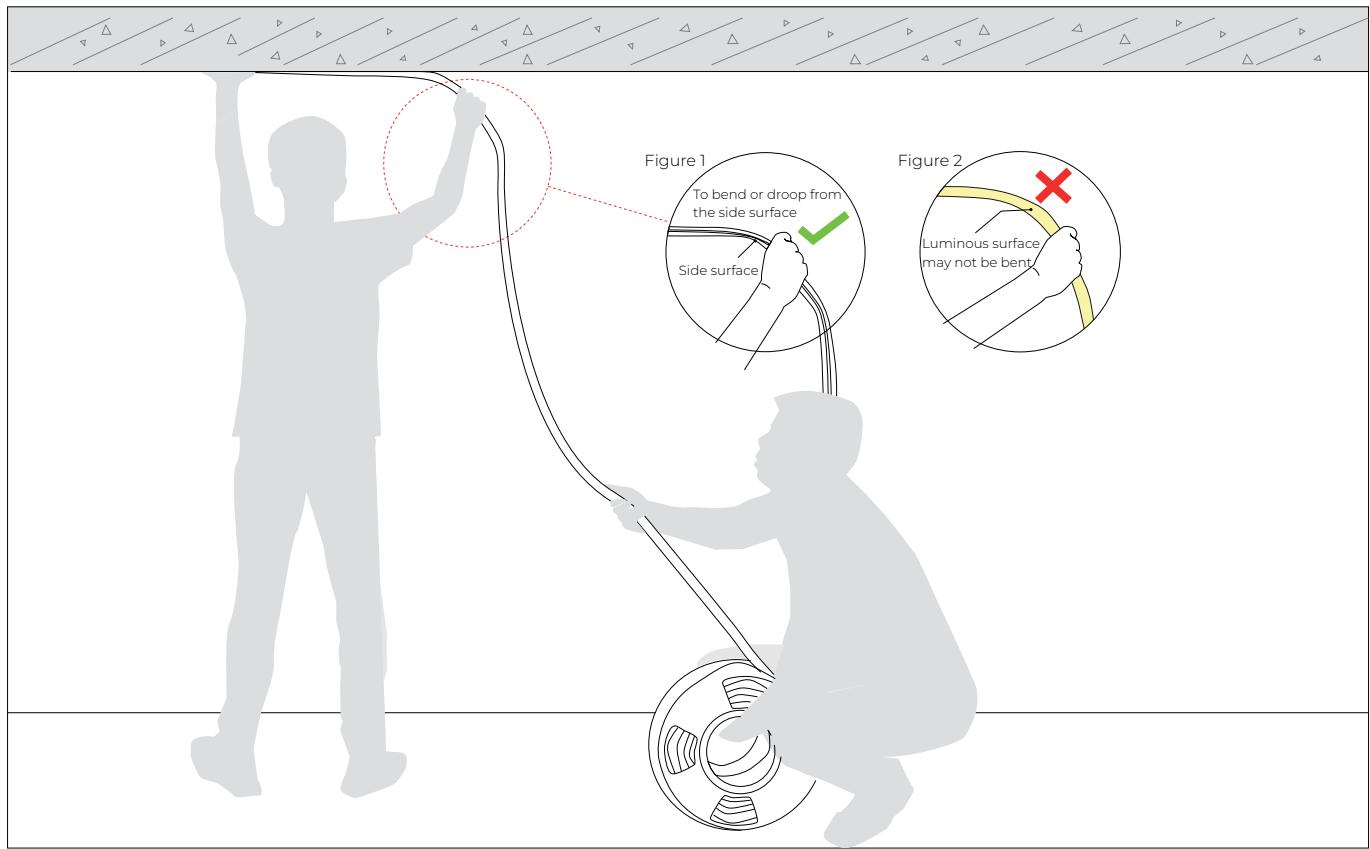
1. Installer:

- Press the light with the palm of the left hand to slowly load it into the slot. Straighten the light with your right hand so that it droop naturally. See Figure 1.
- Luminous surface may not be bent. See Figure 2.

2. Assistant:

- Cooperate with the installer to slowly deliver the light to installer. Do not pull or twist the light during the installation.

Notes

The selection of the cable specification at the output end of the power supply, it depends on the total current of the load and the length of the cable. It is recommended to select according to the following table:

Current of the light	Specifications of the cable								
	L=1M	L=2M	L=4M	L=6M	L=8M	L=10M	L=12M	L=14M	L=16M
1A	AWG26	AWG23	AWG21	AWG18	AWG18	AWG17	AWG16	AWG15	AWG15
2A	AWG23	AWG21	AWG18	AWG16	AWG15	AWG14	AWG13	AWG12	AWG12
3A	AWG22	AWG18	AWG16	AWG14	AWG13	AWG12	AWG11	AWG11	AWG10
4A	AWG21	AWG18	AWG15	AWG13	AWG12	AWG11	AWG10	AWG9	AWG9
5A	AWG20	AWG17	AWG14	AWG12	AWG11	AWG10	AWG9	AWG9	AWG8
6A	AWG18	AWG16	AWG13	AWG11	AWG10	AWG9	AWG8	AWG8	AWG7
7A	AWG18	AWG15	AWG12	AWG11	AWG9	AWG8	AWG8	AWG7	AWG6
8A	AWG17	AWG15	AWG12	AWG10	AWG9	AWG8	AWG7	AWG7	AWG6
9A	AWG17	AWG14	AWG11	AWG10	AWG8	AWG7	AWG7	AWG6	AWG5
10A	AWG16	AWG14	AWG11	AWG9	AWG8	AWG7	AWG6	AWG6	AWG5

※The unused light should be sealed with the packaging bag to avoid prolonged exposure.

※Please use DC24V isolated constant voltage power supply with ripple voltage less than 5%. Using other types of power supply may damage the light or cause other safety risks.

※In practical application, 20% allowance should be reserved for power supply to ensure the stability of power supply.

※It is recommended that professionals connect the power supply. Do not connect the power supply with live power to avoid electric shock.

※Please confirm whether the voltage of the power supply is consistent with the voltage of the light; Pay attention to the positive and negative poles of the power cord, do not connect wrong, so as not to cause product damage;

※ When multiple power supplies are used, ensure that the positive poles of the power supply are not connected in parallel. Otherwise, the power supply system may be unstable or damaged after long-term operation.

※ If the actual application length exceeds the specified length, it will lead to overload, heating and uneven brightness of the light.

※ During installation, please do not scratch, twist, or bend the light irregularly. Otherwise, the light may be damaged beyond repair.

※ To ensure the life and reliability of the light, please do not over bend the light, which will damage the product itself.

※ To protect your eyes, please avoid staring at the glowing surface of the light for a long time.

※ Non-professionals are forbidden to install, disassemble and maintain the product.

※ Do not use any acid or alkaline adhesive to fix the light (including but not limited to glass glue, etc.)

※IP67 products are not suitable for long-term immersion in water; IP68 products are only customized by the factory. After cutting and processing by users themselves, there is a risk that IP68 protection level cannot be reached

※ Because of the difference in structure, even if the same color temperature value, different sizes of light will look slightly different colors. Please confirm it before use.

Tests showed that methanol and benzenes will have yellowing effects on silicone.

In the newly decorated interior environment, epoxy floor paint, wall paint, wallpaper adhesive, various decoration materials or new furniture, they are likely to release of methanol and benzenes.

It is recommended to remove methanol and benzenes first, or ventilate for a period of time in the newly decorated interior environment before install the silicone neon light, to avoid affecting the silicone body.