


T3 series 120V Dimmable Under-cabinet lighting

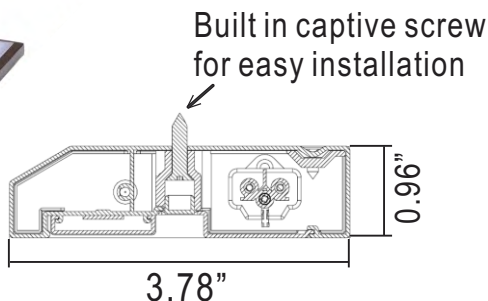

Catalog No. _____

Date _____

Type _____

Project _____

■ Fixture includes:

- Complete ready to install under-cabinet fixture
- Captive mounting screw already on fixture
- 1/2" Die-Cast metallic cable clamp
- Directly end-to-end connector




■ T3 series Dimensions for ordering codes:

8" fixture total length = 8.70" order code length = L200BD01
 12" fixture total length = 12.30" order code length = L300BD01
 18" fixture total length = 18.20" order code length = L450BD01
 24" fixture total length = 24.20" order code length = L600BD01
 32" fixture total length = 32.70" order code length = L800BD01

■ Accessories:

Item No.	Description
LJP 0150	6" Jumper/flex cord
LJP 0300	12" Jumper/flex cord
LJP 0600	24" Jumper/flex cord
LJP 1800	72" Jumper/flex cord
LPC1800	72" 3 prong Cord & plug set
(Portable UL153 standard listing)	
LJP & LPC cords available in black or white color only	

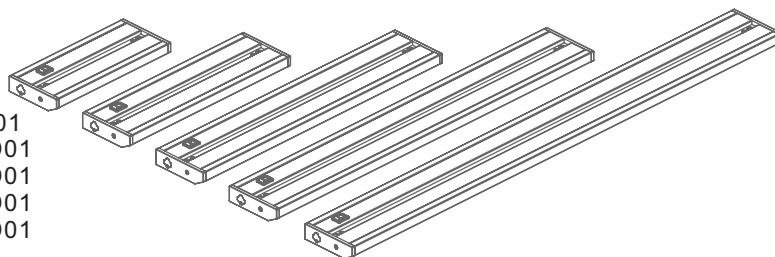

Available in five sizes:
 Lengths = 8" (L200) | 12" (L300) | 18" (L450)
 24" (L600) | 32" (L800)



JBL Direct wire junction box with switch
 JBL-OCS Direct wire Occupancy sensor box with switch
 JBL is under UL 1598 standard as hardwired junction box
 available color is white and bronze same as under-cabinet fixtures
 For JBL Spec sheet please refer to JBL series for details

Finishes:



Bronze (BZ)

White (WH)

Photometric data and LM 79 please refer to our web site for downloading


Description

T3 series is a low profile under-cabinet fixture under 1" in height. Bright LED that is dimmable with most incandescent dimmers it provides even illumination from our diffuse lens to provide excellent lighting effect. Cool to touch operation and virtually no heat, no UV or forward heat. Low profile height = 0.96 inches. 5 sizes to choose from. Rear raceway cover and 1/2 inch knockout along back and top of fixture housing for easy access. Modular design for maximum flexibility and quick installation via captive screws.

LED Performance

LED: 5630
SDCM: 3 Step Macadam Elipse
CCT: 3000K, 4000K
CRI: >80 Typically 83 (Optional 90+ CRI is available)
LIFE: 70% of initial lumens after 50,000 hrs
Warranty: 5 Year Limited Fixture Warranty

Available accessories for T3 series

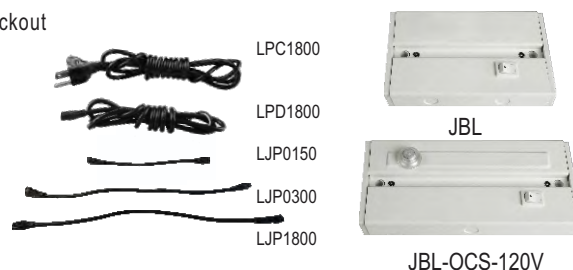

Example: To order T3 under-cabinet fixture in 24" white and 3000K = **T3L600BD01WH830**

1 Item Code	2 Length Code	3 Finish Code	4 CCT Code
T3	L600BD01	WH White BZ Bronze	830 3000K 840 4000K

Technical Specs

- 5 difference sizes dimmable under-cabinet fixtures
- 2.8~10.8 W dimmable under-cabinet fixtures
- Typical 250 lumen/foot
- Listing for hardwired and portable application
- Dimmable
- Linkable up to 400 watt
- Comply with Energy Star certifications.