

Installation Instructions

URGENT: READ PRIOR TO ATTEMPTING INSTALLATION

KV Series CLASS II DIMMABLE HARDWIRE LED DRIVER (Refer in instruction also as Power Unit /Driver)



ALWAYS TURN OFF MAIN POWER BEFORE INSTALLATION

Item#	Description	Rating
KV-24030-TDL	24V 30W Class II Hardwired Dimmable Driver	30W@ 24V
KV-24060-TDL	24V 60W Class II Hardwired Dimmable Driver	60W@ 24V
KV-24080-TDL	24V 80W Class II Hardwired Dimmable Driver	80W @24V
*TDL series is 120V TRIAC Dimmable only		

INSTALLATION SHOULD BE CARRIED OUT BY YOUR LOCAL ELECTRICIAN.

• Installation Instruction

- Insert screwdriver, lift up cover of Power Unit / Driver wiring compartment (Step. 1)
- Determine which side you are going to feed Power from through 1/2" hole (Step.1)
- Feed line voltage wire 120V using left 1/2 hole (ground wire using 18AWG) (Step.2)
- Feed wire 24V to supply power to fixture through 1/2 hole (Step.3)
- Use proper strain relief to secure wire according to N.E.C. code.
- Replace Power Unit / Driver cover once wiring completed (Step.4)

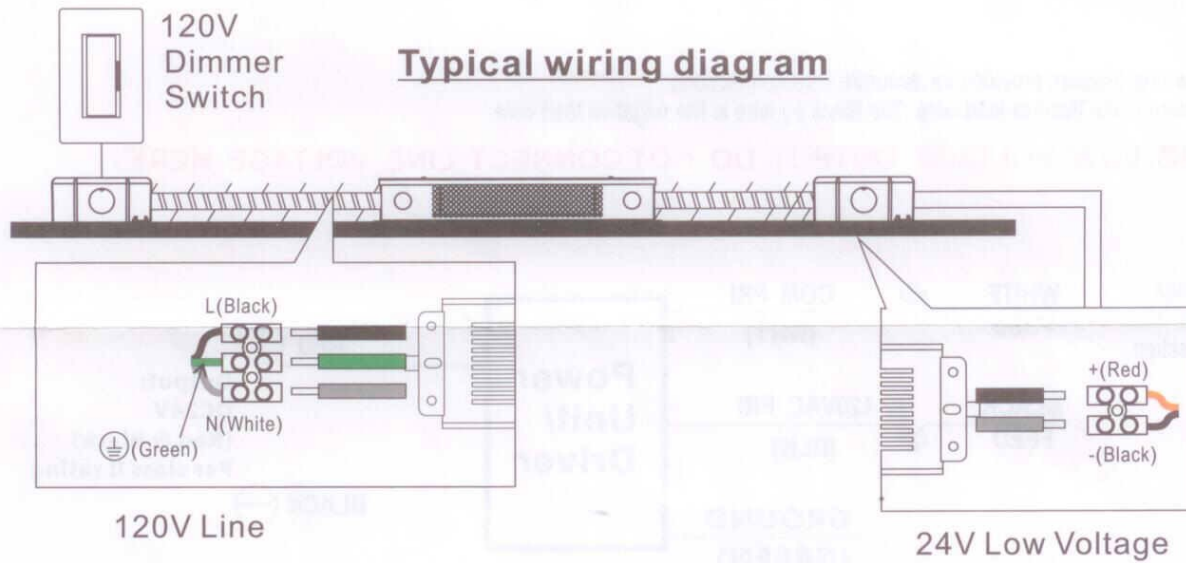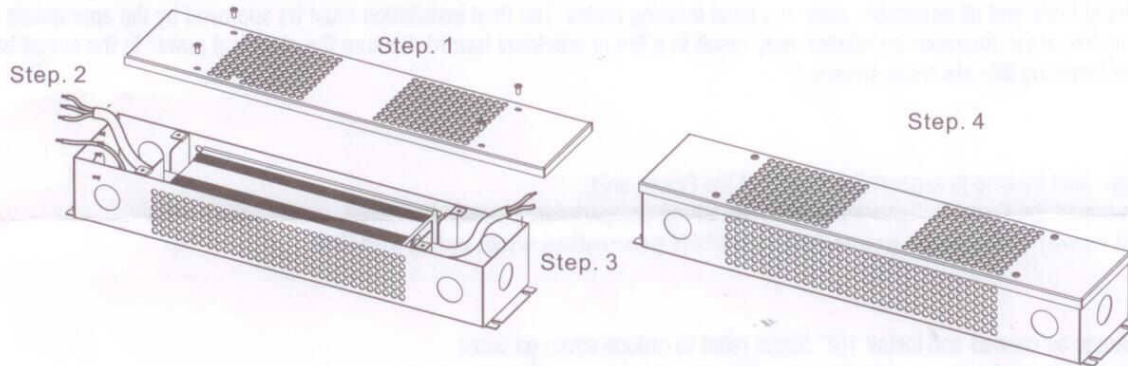

For further installation help please contact your local distributors